



CALIBRE® CA5500 SERIES
Models 5501, 5502, 5503

(Norton 8301/8501 Series, Yale 3301/3501 Series, Hager 5200 Series, & Dorma 8600 Series Type)

Applications:

The 5500 Series is designed to provide full door closing control suitable for all aluminum and glass storefront, hollow metal, and wood doors for commercial door use applications. Retrofits directly for the Norton 8000 Series, Yale 3000 Series, and the Dor-O-Matic SC80 Series door closers. The 5000 Series is available in ADA adjustable spring sizes: 1~5 and 1~4 for use on offset pivoted, butt hung, or continuous geared hinged doors. Special adapting hardware is available for use with the 5500 Series closers, including drop plates, sex nuts/bolts, and parallel arm brackets. A high impact molded Full PVC Dress Cover is included, and a Slim Line Cover is optional.

Listings and Approvals:

- Complies to BHMA/ANSI A156.4 Grade 1, Types C02011, C02021, C02041, C03011, C03021, and C03041.
- Barrier Free Operations to comply with Federal Accessibility Standards (ADA) and ANSI A117.1 (4,13,11).
- Underwriters' Laboratories Inc. Listed UL10C for positive pressure and UBC 7.2 (1997) BS476 for Fire Safety.

Warranty: 5-Years

Range of Door Sizes:

- Exterior & Interior door widths to 48".
- Door heights to 108".
- Door weights to 240 pounds.
- Models 5502 and 5503 can be adjusted to meet ADA maximum 5lbf opening forces on properly hung interior doors.

Finishes:

Standard Baked Enamel Finishes:
 AL / 689 (Aluminum)
 DU / 695 (Dark Duranodic Bronze)



Door Closer Mounting Options:

- Standard - on Pull Side of the Door
- Top Jamb - on Push Side of the Door
- Parallel Arm- on Push Side of the Door


Door Closer Arm Options:

- Regular forearm for Standard, Top Jamb, and Parallel Arm (Parallel Arm Bracket required).
- Friction type Hold-Open forearm.

ANSI A156.4-2008 Closer Functions:

- Adjustable Spring Tension.
- Adjustable Back-Check (Model 5501).
- Adjustable Closing/ Sweep Speed.
- Adjustable Latch Speed.
- Optional Delayed Closing (Model 5502) from full door opening to approximately 70°.

Door Closer Dimensional Data:

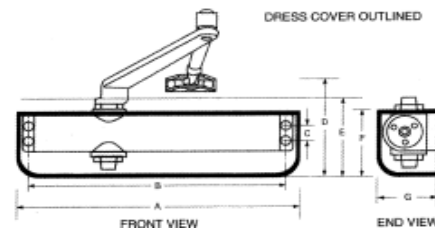

	With Cover	No Cover
A. Length of Closer Body	13"	12-11/16"
B. Horizontal Mounting Holes	12"	12"
C. Vertical Mounting Holes	3/4"	3/4"
D. Projection from Door	2-5/16"	2-3/16"

Contact Information:

Calibre Door Closers, Inc.
 1481 N. Main Street, Orange, CA 92867-3403
 Tel: 800/560-0012 ▪ Fax: 714/633-5102
 Email: info@calibredoorclosers.com
 www.calibredoorclosers.com